



## **Installation** Instructions

AQ-5100, AQ-5200 & AQ-5300 Under Counter Water Filter  
Single Stage (5100), Two Stage (5200) and Three Stage (5300) systems

Welcome to the Aquasana experience. You are about to enjoy clean, healthy water and the peace of mind that comes from knowing award-winning filter technology is working for you.



Chrome

Brushed Nickel

Oil-Rubbed Bronze



The AQ-5200 & 5300 comes in three designer finishes, Chrome, Brushed Nickel and Oil-Rubbed Bronze.

The AQ-5100 is only available with the Chrome finish.

The faucet may be mounted on the sink using an existing hole for a sprayer nozzle or soap dispenser, or by drilling a hole at least 1/2" in diameter. Be sure the location of the faucet allows the spout to extend slightly past the edge of the sink. Note: we recommend enlisting the services of an approved or certified professional if drilling is required.

## Preparing for Installation

*Please read entire installation guide before installing the filter system.*

### Tools Recommended for Installation

- Variable speed drill w/ 7/32" bit
- Adjustable wrench
- Measuring tape
- Bucket
- Phillips head screwdriver
- Hammer


Before beginning installation, please ensure all parts listed are present. If any part is missing or damaged, do not attempt to install the filter. Please contact Customer Service for replacement parts at (866) 662-6885.

**Estimated Installation Time: 45 minutes**


# Easy to install



**1** Unpack and unwrap contents. Turn off and disconnect the cold water supply.

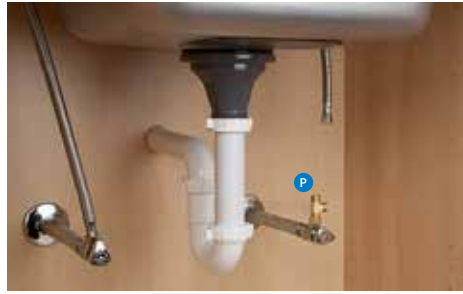


**2** Attach threaded ends of supplied brass tee to the cold water supply line and shut-off valve; tighten using an adjustable wrench.

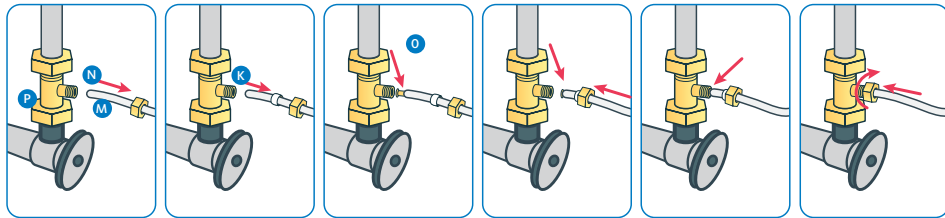


**3** Attach white tube to the brass tee: Slide the compression nut onto the white tubing (with threads of the nut facing the end of the white tube). Next, slide the plastic sleeve onto the white tube. Place brass insert into the opening of white tube. Push the tip of the white tubing into the opening of the brass tee. While holding the white tube in place inside the brass tee, tighten the compression nut to compress the plastic sleeve and create a seal. NOTE: Use a wrench to ensure complete seal. Avoid over tightening.

**4** Faucet Installation: Install as shown. Tighten nut to secure faucet to sink.

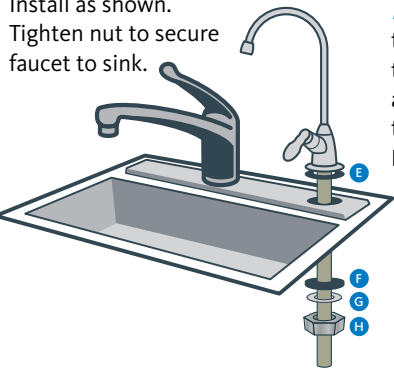


**5** Faucet Connection: connect the outlet hose to the base of the faucet by sliding the chrome nut onto the tube followed by the white collar. Place the white insert into the end of the tube. Press the tube against the faucet base and slide the nut and collar up to the threads. Use wrench to ensure seal is sufficiently tight. Note: Avoid over tightening.

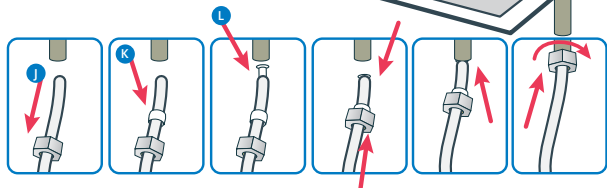

**6** Unit Installation: Select a space under your sink for the filter unit that is at least 12 inches from the bottom of your cabinet and allows for easy access to your cold water supply and for filter replacements. Use the mounting holes located at the back of the unit to mark the wall screw placements with a pencil. Center to center hole distances:  
AQ-5100: 41mm  
AQ-5200: 65mm  
AQ-5300: 98mm




**7** Use a 7/32" drill bit to drill holes for the plastic anchors provided. Carefully tap the anchors into the drilled hole with a hammer. Mount unit to the wall with the screws. For the AQ-5200 and AQ-5300 — Pull the protective plastic strip from the battery compartment. The red LED should flash and beep five (5) times to indicate that the battery is installed correctly.

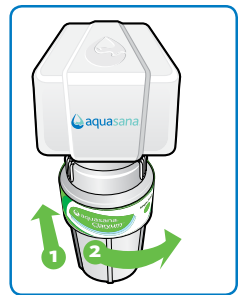

**8** Attach each sump to the bottom of the unit housing. Align connection points, push the sump up and turn to the right. Ensure that the sump is locked in.



**9** Connect supply lines: insert tubing from the tee fitting into the inlet side and insert tubing from the faucet into the outlet side. Use diagram on the right to mark tubing depth to ensure they get inserted completely. **It is VERY IMPORTANT to insert tubing completely so leaking does not occur.**

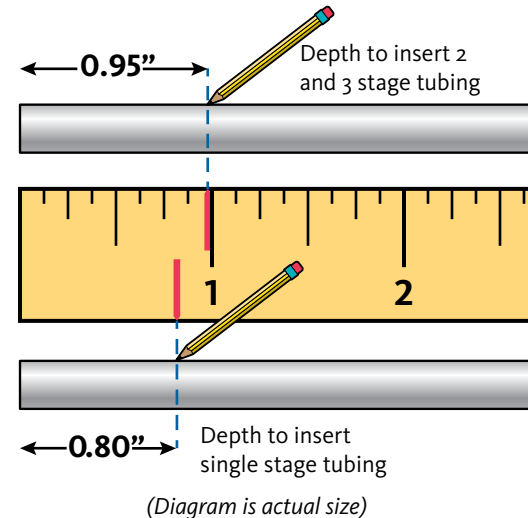

**10** Turn the cold water on. Check for leaks and proper installation: place a towel under the filter unit and check for leaks. Allow water to run for 10 minutes to flush carbon fines. Note: Never use oils to lubricate the O-rings; O-rings come pre-lubricated.

## Care and Maintenance

To clean your filter unit, wipe down the exterior with a damp cloth.

### For the AQ-5200 and AQ-5300 only:

Once filters are at 95% capacity (about every 6 months), the battery alarm will sound and flash red when water is flowing and will continue for 15 seconds once water is turned off. Change the battery every time you replace your filters. The battery is included with the filter replacement cartridges.

## Pure Satisfaction



All Aquasana products offer a 90-day 100% satisfaction guarantee. (A 1-year warranty is included, which covers defects in materials and workmanship.) If for any reason you are not satisfied with your purchase, simply call us or the dealer you purchased from. A Return Authorization Code and a full refund will be promptly issued upon return. Thank you for choosing Aquasana!

This filter system is designed and tested for use with genuine Aquasana parts, including replacement filters, faucet and all hardware. Use of parts from other manufacturers may result in loss of contaminant reduction performance, system damage or failure. Use of parts from other manufacturers will also void your warranty. Please visit [www.aquasana.com](http://www.aquasana.com) for all replacement parts.

For conditions of use, health claims certified by the California Department of Public Health, and replacement parts see product data sheet.

California Department of Public Health Certification Number 13-2173.

### AQ-5100

Replacement cartridge:  
AQ-5100R

Rated service flow:  
0.5 gpm

Max capacity:  
200 gal

Min working pressure:  
20 psi (1.40 kg/cm<sup>2</sup>)

Max working pressure:  
80 psi (5.62 kg/cm<sup>2</sup>)

Min operating temperature:  
40° F (4.44° C)

Max operating temperature:  
90° F (32.22° C)

### AQ-5200

Replacement cartridge:  
AQ-5200R

Rated service flow:  
0.5 gpm

Max capacity:  
500 gal

Min working pressure:  
20 psi (1.40 kg/cm<sup>2</sup>)

Max working pressure:  
80 psi (5.62 kg/cm<sup>2</sup>)

Min operating temperature:  
40° F (4.44° C)

Max operating temperature:  
90° F (32.22° C)

### AQ-5300

Replacement cartridge:  
AQ-5300R

Rated service flow:  
0.5 gpm

Max capacity:  
600 gal

Min working pressure:  
20 psi (1.40 kg/cm<sup>2</sup>)

Max working pressure:  
80 psi (5.62 kg/cm<sup>2</sup>)






Min operating temperature:  
40° F (4.44° C)

Max operating temperature:  
90° F (32.22° C)

Do not use with water that is microbiologically unsafe or of unknown water quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected waters that may contain filterable cysts.


## Precautions:

- Filter is only to be used with cold water.
- If you experience a leak at the hose connection, disconnect and re-seat the hose.
- Installation must comply with local laws.
- Aquasana is not liable for consequential or incidental damages due to improper installation.

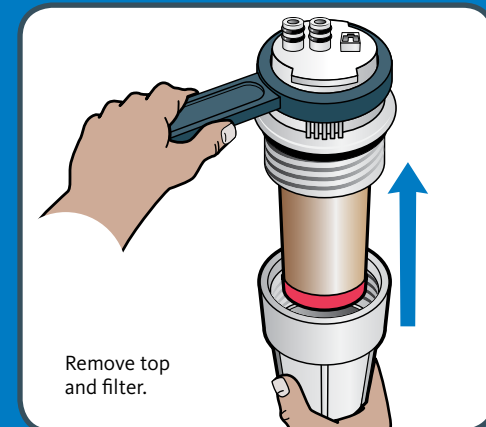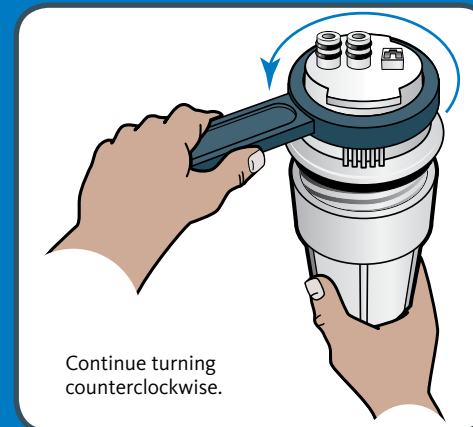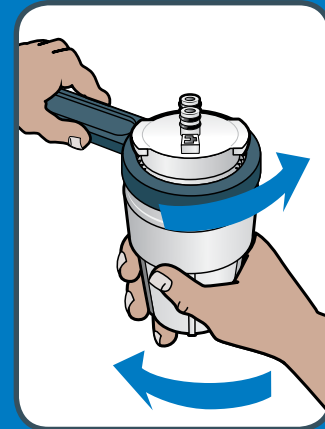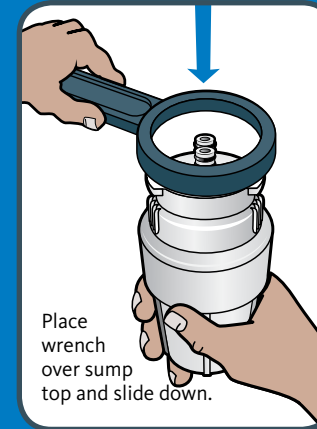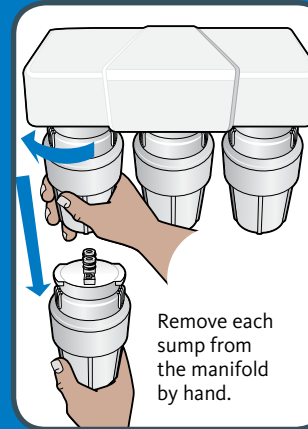

## WARNING

Do not use tools to remove or tighten sumps. Over tightening can cause damage and result in leaking. Hand tighten only.

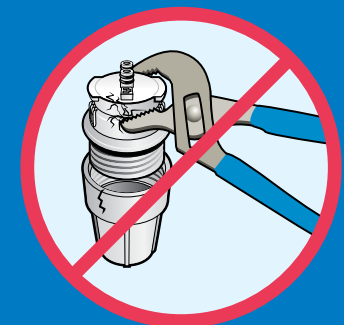



Performance Data for the Aquasana Under Counter Water Filter					
Model	Replacement	Operating pressure range	Rated capacity	Operating temperature	Rated flow
AQ-5100	AQ-5100R	20-80 psi 140-5524 kg/cm <sup>2</sup>	200 gallons 757 liters	40-90° F 4.44-32.2° C	0.5 gpm 1.9 lpm
Manufactured by: Aquasana, Inc. 6310 Midway Road · Haltom City, Texas 76117 · 866.662.6885					

Testing Performed under NSF/ANSI Standards 42 and 53 and in accordance with the California Department of Health Services Drinking Water Treatment Device Program. This system has been tested according to NSF/ANSI 42, 53, 401 & P473 for reduction of the substances listed below. The concentration of the indicated substances in water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system, as specified in NSF/ANSI 42, 53, 401 & P473.

NSF/ANSI 42	Minimum reduction	Overall % reduction	Results
Chlorine Reduction, Free Available	<0.5 mg/l	96.06%	Pass
Chloramine Reduction, Free Available	<0.5 mg/l	96.06%	Pass
Particulate Reduction	85%	99.9%	Pass

NSF/ANSI 53	Required reduction	Overall % reduction	Results
Cyst Live Cryptosporidium & Giardia	99.95%	>99.95%	Pass
Mercury Reduction pH 8.5	<2 ug/L	>96.7%	Pass
Mercury Reduction pH 6.5	<2 ug/L	>96.6%	Pass
Lead Reduction pH 6.5	<10 ug/L	>99.3%	Pass
Lead Reduction pH 8.5	<10 ug/L	>99.4%	Pass
MTBE Reduction	<5 ug/L	91.2%	Pass
Turbidity	<0.5 NTU	99.1%	Pass
VOC Surrogate Test	95%	95%	Pass
Asbestos Reduction	99%	>99%	Pass

NSF/ANSI 401	Maximum Concentration	Minimum Reduction	Overall % Reduction	Results
Atenolol	30 ng/L	94.2%	94.2%	Pass
Bisphenol A	300 ng/L	98.80%	98.9%	Pass
Carbamazepine	200 ng/L	98.6%	98.6%	Pass
DEET	200 ng/L	98.7%	98.7%	Pass
Estrone	20 ng/L	96.30%	96.5%	Pass
Ibuprofen	60 ng/L	95.3%	95.4%	Pass
Linuron	20 ng/L	96.6%	96.6%	Pass
Meprobamate	60 ng/L	94.7%	94.7%	Pass
Metolachlor	200 ng/L	98.6%	98.6%	Pass
Naproxen	20 ng/L	96.3%	96.4%	Pass
Nonyl phenol	200 ng/L	97.50%	97.5%	Pass
Phenytol	30 ng/L	95.50%	95.6%	Pass
TCEP	700 ng/L	98%	98%	Pass
TCPP	700 ng/L	97.8%	97.8%	Pass
Trimethoprim	20 ng/L	96.7%	96.7%	Pass

NSF P473	Influent challenge concentration	Maximum permissible product water concentration	Overall % reduction	Results
Perfluorooctanoic acid (PFOA) & Perfluorooctane sulfonate (PFOS)	1.5 ±10% ug/L	0.07 ug/L	96%	Pass

- Filter is only to be used with cold water.
- Filter usage must comply with all state and local laws.
- Testing was performed under standard laboratory conditions, actual performance may vary.
- Systems certified for cyst reduction may be used on disinfected waters that may contain filterable cysts.
- See owner's manual for general installation conditions and needs plus manufacturer's limited warranty.
- All contaminants reduced by this filter are listed.
- Not all contaminants listed may be present in your water.
- Filter does not remove all contaminants that may be present in tap water.



System tested and certified by NSF International against NSF/ANSI Standard 42, 53 & 401 and conforms to NSF protocol P473 for reduction of claims specified on the Performance Data Sheet and at [www.nsf.org](http://www.nsf.org).



Performance Data for the Aquasana Under Counter Water Filter					
Model	Replacement	Operating pressure range	Rated capacity	Operating temperature	Rated flow
AQ-5200	AQ-5200R	20-80 psi 140-5524 kg/cm <sup>2</sup>	500 gallons 1892 liters	40-90° F 4.44-32.2° C	0.5 gpm 1.9 lpm
Manufactured by: Aquasana, Inc. 6310 Midway Road · Haltom City, Texas 76117 · 866.662.6885					

Testing Performed under NSF/ANSI Standards 42 and 53 and in accordance with the California Department of Health Services Drinking Water Treatment Device Program. This system has been tested according to NSF/ANSI 42, 53, 401 & P473 for reduction of the substances listed below. The concentration of the indicated substances in water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system, as specified in NSF/ANSI 42, 53, 401 & P473.

NSF/ANSI 42	Minimum reduction	Overall % reduction	Results
Chlorine Reduction, Free Available	<0.5 mg/l	97.66%	Pass
Chloramine Reduction, Free Available	<0.5 mg/l	97.66%	Pass
Particulate Reduction	85%	99.9%	Pass

NSF/ANSI 53	Required reduction	Overall % reduction	Results
Cyst Live Cryptosporidium & Giardia	99.95%	>99.99%	Pass
Mercury Reduction pH 8.5	<2 ug/L	>95.8%	Pass
Mercury Reduction pH 6.5	<2 ug/L	>96.5%	Pass
Lead Reduction pH 6.5	<10 ug/L	>99.4%	Pass
Lead Reduction pH 8.5	<10 ug/L	>99.3%	Pass
MTBE Reduction	<5 ug/L	86.6%	Pass
Turbidity	<0.5 NTU	99.1%	Pass
VOC Surrogate Test	95%	99.4%	Pass
Asbestos Reduction	99%	>99%	Pass

NSF/ANSI 401	Maximum Concentration	Minimum Reduction	Overall % Reduction	Results
Atenolol	30 ng/L	94.2%	94.2%	Pass
Bisphenol A	300 ng/L	98.80%	98.9%	Pass
Carbamazepine	200 ng/L	98.6%	98.6%	Pass
DEET	200 ng/L	98.7%	98.7%	Pass
Estrone	20 ng/L	96.30%	96.5%	Pass
Ibuprofen	60 ng/L	95.3%	95.4%	Pass
Linuron	20 ng/L	96.6%	96.6%	Pass
Meprobamate	60 ng/L	94.7%	94.7%	Pass
Metolachlor	200 ng/L	98.6%	98.6%	Pass
Naproxen	20 ng/L	96.3%	96.4%	Pass
Trichloroacetone	200 ng/L	97.50%	97.5%	Pass
Phenytol	30 ng/L	95.50%	95.6%	Pass
TCEP	700 ng/L	98%	98%	Pass
TCPP	700 ng/L	97.8%	97.8%	Pass
Trimethoprim	20 ng/L	96.7%	96.7%	Pass

NSF P473	Influent challenge concentration	Maximum permissible product water concentration	Overall % reduction	Results
Perfluorooctanoic acid (PFOA) & Perfluorooctane sulfonate (PFOS)	1.5 ±10% ug/L	0.07 ug/L	96%	Pass

- Filter is only to be used with cold water.
- Filter usage must comply with all state and local laws.
- Testing was performed under standard laboratory conditions, actual performance may vary.
- Systems certified for cyst reduction may be used on disinfected waters that may contain filterable cysts.
- See owner's manual for general installation conditions and needs plus manufacturer's limited warranty.
- All contaminants reduced by this filter are listed.
- Not all contaminants listed may be present in your water.
- Filter does not remove all contaminants that may be present in tap water.
- For conditions of use, health claims certified by the California Department of Public Health, and replacement parts see product data sheet.
- California Department of Public Health Certification Number

13-2172



System tested and certified by NSF International against NSF/ANSI Standard 42, 53 & 401 and conforms to NSF protocol P473 for reduction of claims specified on the Performance Data Sheet and at [www.nsf.org](http://www.nsf.org).

Organic chemicals included by surrogate testing					
VOCs (by surrogate testing using chloroform)	Drinking water regulatory level (MCL/MAC) mg/L	Influent/ Unfiltered	Effluent/ Filtered	Percent Reduction	
alachlor	0.002	0.050	0.001	>98%	
atrazine	0.003	0.100	0.003	>97%	
benzene	0.005	0.081	0.001	>99%	
carbofuran	0.04	0.190	0.001	>99%	
carbon tetrachloride	0.005	0.078	0.0018	98%	
chlorobenzene	0.1	0.077	0.001	>99%	
chloropicrin	—	0.015	0.0002	99%	
2,4-D	0.07	0.110	0.0017	98%	
dibromochloropropane (DBCP)	0.0002	0.052	0.00002	>99%	
o-dichlorobenzene	0.6	0.080	0.001	>99%	
p-dichlorobenzene	0.075	0.040	0.001	>98%	
1,2-dichloroethane	0.005	0.088	0.0048	95%	
1,1-dichloroethylene	0.007	0.083	0.001	>99%	
cis-1,2-dichloroethylene	0.07	0.170	0.0005	>99%	
trans-1,2-dichloroethylene	0.1	0.086	0.001	>99%	
1,2-dichloropropane	0.005	0.080	0.001	>99%	
cis-1,3-dichloropropylene	—	0.079	0.001	>99%	
dinoseb	0.007	0.170	0.0002	99%	
endrin	0.002	0.053	0.00059	99%	
ethylbenzene	0.7	0.088	0.001	>99%	
ethylene dibromide (EDB)	0.00005	0.044	0.00002	>99%	
haloacetonitriles (HAN)					
Bromochloroacetonitrile	—	0.022	0.0005	98%	
Dibromoacetonitrile	—	0.024	0.0006	98%	
Dichloroacetonitrile	—	0.0096	0.0002	98%	
Trichloroacetonitrile	—	0.015	0.0003	98%	
haloketones (HK)					
1,1-dichloro-2-propanone	—	0.0072	0.0001	99%	
1,1,1-trichloro-2-propanone	—	0.0082	0.0003	96%	
heptachlor (H-34, Heptox)	0.0004	0.025	0.00001	>99%	
heptachlor epoxide	0.0002	0.0107	0.0002	98%	
hexachlorobutadiene	—	0.044	0.001	>98%	
hexachlorocyclopentadiene	0.05	0.060	0.000002	>99%	
lindane	0.0002	0.055	0.00001	>99%	
methoxychlor	0.04	0.050	0.0001	>99%	
pentachlorophenol	0.001	0.096	0.001	>99%	
simazine	0.004	0.120	0.004	>97%	
styrene	0.1	0.150	0.0005	>99%	
1,1,2,2-tetrachloroethane	—	0.081	0.001	>99%	
tetrachloroethylene	0.005	0.081	0.001	>99%	
toluene	1	0.078	0.001	>99%	
2,4,5-TP (silvex)	0.05	0.270	0.0016	99%	
tribromoacetic acid	—	0.042	0.001	>98%	
1,2,4-trichlorobenzene	0.07	0.160	0.0005	>99%	
1,1,1-trichloroethane	0.2	0.084	0.0046	95%	
1,1,2-trichloroethane	0.005	0.150	0.0005	>99%	
trichloroethylene	0.005	0.180	0.0010	>99%	
Trihalomethanes (THMs)		Influent/ Unfiltered	Effluent/ Filtered	Percent Reduction	
Bromodichloromethane (THM)					
Bromoform (THM)					
Chloroform (THM)					
Chlorodibromomethane (THM)	0.080	0.300	0.015	95%	
Xylenes (total)	10	0.070	0.001	>99%	



Do not use with water that is microbiologically unsafe or of unknown water quality without adequate disinfection before or after the system.

Organic chemicals included by surrogate testing					
VOCs (by surrogate testing using chloroform)	Drinking water regulatory level (MCL/MAC) mg/L	Influent/ Unfiltered	Effluent/ Filtered	Percent Reduction	
alachlor	0.002	0.050	0.001	>98%	
atrazine	0.003	0.100	0.003	>97%	
benzene	0.005	0.081	0.001	>99%	
carbofuran	0.04	0.190	0.001	>99%	
carbon tetrachloride	0.005	0.078	0.0018	98%	
chlorobenzene	0.1	0.077	0.001	>99%	
chloropicrin	—	0.015	0.0002	99%	
2,4-D	0.07	0.110	0.0017	98%	
dibromochloropropane (DBCP)	0.0002	0.052	0.00002	>99%	
o-dichlorobenzene	0.6	0.080	0.001	>99%	
p-dichlorobenzene	0.075	0.040	0.001	>98%	
1,2-dichloroethane	0.005	0.088	0.0048	95%	
1,1-dichloroethylene	0.007	0.083	0.001	>99%	
cis-1,2-dichloroethylene	0.07	0.170	0.0005	>99%	
trans-1,2-dichloroethylene	0.1	0.086	0.001	>99%	
1,2-dichloropropane	0.005	0.080	0.001	>99%	
cis-1,3-dichloropropylene	—	0.079	0.001	>99%	
dinoseb	0.007	0.170	0.0002	99%	
endrin	0.002	0.053	0.00059	99%	
ethylbenzene	0.7	0.088	0.001	>99%	
ethylene dibromide (EDB)	0.00005	0.044	0.00002	>99%	
haloacetonitriles (HAN)					
Bromochloroacetonitrile	—	0.022	0.0005	98%	
Dibromoacetonitrile	—	0.024	0.0006	98%	
Dichloroacetonitrile	—	0.0096	0.0002	98%	
Trichloroacetonitrile	—	0.015	0.0003	98%	
haloketones (HK)					
1,1-dichloro-2-propanone	—	0.0072	0.0001	99%	
1,1,1-trichloro-2-propanone	—	0.0082	0.0003	96%	
heptachlor (H-34, Heptox)	0.0004	0.025	0.00001	>99%	
heptachlor epoxide	0.0002	0.0107	0.0002	98%	
hexachlorobutadiene	—	0.044	0.001	>98%	
hexachlorocyclopentadiene	0.05	0.060	0.000002	>99%	
lindane	0.0002	0.055	0.00001	>99%	
methoxychlor	0.04	0.050	0.0001	>99%	
pentachlorophenol	0.001	0.096	0.001	>99%	
simazine	0.004	0.120	0.004	>97%	
styrene	0.1	0.150	0.0005	>99%	
1,1,2,2-tetrachloroethane	—	0.081	0.001	>99%	
tetrachloroethylene	0.005	0.081	0.001	>99%	
toluene	1	0.078	0.001	>99%	
2,4,5-TP (silvex)	0.05	0.270	0.0016	99%	
tribromoacetic acid	—	0.042	0.001	>98%	
1,2,4-trichlorobenzene	0.07	0.160	0.0005	>99%	
1,1,1-trichloroethane	0.2	0.084	0.0046	95%	
1,1,2-trichloroethane	0.005	0.150	0.0005	>99%	
trichloroethylene	0.005	0.180	0.0010	>99%	
Trihalomethanes (THMs)		Influent/ Unfiltered	Effluent/ Filtered	Percent Reduction	
Bromodichloromethane (THM)					
Bromoform (THM)					
Chloroform (THM)					
Chlorodibromomethane (THM)	0.080	0.300	0.015	95%	
Xylenes (total)	10	0.070	0.001	>99%	



Do not use with water that is microbiologically unsafe or of unknown water quality without adequate disinfection before or after the system.





Performance Data for the AquaSana Under Counter Water Filter					
Model	Replacement	Operating pressure range	Rated capacity	Operating temp range	Rated flow
AQ-5300	AQ-5300R	20-80 psi 140-5524 kg/cm <sup>2</sup>	600 gallons 2270 liters	40-90° F 4.44-32.2° C	0.5 gpm 1.9 lpm
Manufactured by: AquaSana, Inc. 6310 Midway Road · Haltom City, Texas 76117 · 866.662.6885					

Testing Performed under NSF/ANSI Standards 42 and 53 and in accordance with the California Department of Health Services Drinking Water Treatment Device Program. This system has been tested according to NSF/ANSI 42, 53, 401 & P473 for reduction of the substances listed below. The concentration of the indicated substances in water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system, as specified in NSF/ANSI 42, 53, 401 & P473.

NSF/ANSI 42	Minimum reduction	Overall % reduction	Results
Chlorine Reduction, Free Available	<0.5 mg/l	97.66%	Pass
Chloramine Reduction, Free Available	<0.5 mg/l	97.66%	Pass
Particulate Reduction	85%	99.9%	Pass

NSF/ANSI 53	Required reduction	Overall % reduction	Results
Cyst Live Cryptosporidium & Giardia	99.95%	>99.99%	Pass
Mercury Reduction pH 8.5	<2 ug/L	>95.8%	Pass
Mercury Reduction pH 6.5	<2 ug/L	>96.5%	Pass
Lead Reduction pH 6.5	<10 ug/L	>99.4%	Pass
Lead Reduction pH 8.5	<10 ug/L	>99.3%	Pass
MTBE Reduction	<5 ug/L	86.6%	Pass
Turbidity	<0.5 NTU	99.1%	Pass
VOC Surrogate Test	95%	99.4%	Pass
Asbestos Reduction	99%	>99%	Pass

NSF/ANSI 401	Maximum Concentration	Minimum Reduction	Overall % Reduction	Results
Atenolol	30 ng/L	94.2%	94.2%	Pass
Bisphenol A	300 ng/L	98.80%	98.9%	Pass
Carbamazepine	200 ng/L	98.6%	98.6%	Pass
DEET	200 ng/L	98.7%	98.7%	Pass
Estrone	20 ng/L	96.30%	96.5%	Pass
Ibuprofen	60 ng/L	95.3%	95.4%	Pass
Linuron	20 ng/L	96.6%	96.6%	Pass
Meprobamate	60 ng/L	94.7%	94.7%	Pass
Metolachlor	200 ng/L	98.6%	98.6%	Pass
Naproxen	20 ng/L	96.3%	96.4%	Pass
Nonyl phenol	200 ng/L	97.50%	97.5%	Pass
Phenytoin	30 ng/L	95.50%	95.6%	Pass
TCEP	700 ng/L	98%	98%	Pass
TCPP	700 ng/L	97.8%	97.8%	Pass
Trimethoprim	20 ng/L	96.7%	96.7%	Pass

NSF P473	Influent challenge concentration	Maximum permissible product water concentration	Overall % reduction	Results
Perfluorooctanoic acid (PFOA) & Perfluorooctane sulfonate (PFOS)	1.5 ±10% ug/L	0.07 ug/L	96%	Pass

- Filter is only to be used with cold water.
- Filter usage must comply with all state and local laws.
- Testing was performed under standard laboratory conditions, actual performance may vary.
- Systems certified for cyst reduction may be used on disinfected waters that may contain filterable cysts.
- See owner's manual for general installation conditions and needs plus manufacturer's limited warranty.
- All contaminants reduced by this filter are listed.
- Not all contaminants listed may be present in your water.
- Filter does not remove all contaminants that may be present in tap water.
- For conditions of use, health claims certified by the California Department of Public Health, and replacement parts see product data sheet.
- California Department of Public Health Certification Number **13-2173**



System tested and certified by NSF International against NSF/ANSI Standard 42, 53 & 401 and conforms to NSF protocol P473 for reduction of claims specified on the Performance Data Sheet and at [www.nsf.org](http://www.nsf.org).

Organic chemicals included by surrogate testing				
VOCs (by surrogate testing using chloroform)	Drinking water regulatory level (MCL/MAC) mg/L	Influent/Unfiltered	Effluent/Filtered	Percent Reduction
alachlor	0.002	0.050	0.001	>98%
atrazine	0.003	0.100	0.003	>97%
benzene	0.005	0.081	0.001	>99%
carbofuran	0.04	0.190	0.001	>99%
carbon tetrachloride	0.005	0.078	0.0018	98%
chlorobenzene	0.1	0.077	0.001	>99%
chloropicrin	—	0.015	0.0002	99%
2,4-D	0.07	0.110	0.0017	98%
dibromochloropropane (DBCP)	0.0002	0.052	0.00002	>99%
o-dichlorobenzene	0.6	0.080	0.001	>99%
p-dichlorobenzene	0.075	0.040	0.001	>98%
1,2-dichloroethane	0.005	0.088	0.0048	95%
1,1-dichloroethylene	0.007	0.083	0.001	>99%
cis-1,2-dichloroethylene	0.07	0.170	0.0005	>99%
trans-1,2-dichloroethylene	0.1	0.086	0.001	>99%
1,2-dichloropropane	0.005	0.080	0.001	>99%
cis-1,3-dichloropropylene	—	0.079	0.001	>99%
dinoseb	0.007	0.170	0.0002	99%
endrin	0.002	0.053	0.00059	99%
ethylbenzene	0.7	0.088	0.001	>99%
ethylene dibromide (EDB)	0.00005	0.044	0.00002	>99%
haloacetonitriles (HAN)				
Bromochloroacetonitrile	—	0.022	0.0005	98%
Dibromoacetonitrile	—	0.024	0.0006	98%
Dichloroacetonitrile	—	0.0096	0.0002	98%
Trichloroacetonitrile	—	0.015	0.0003	98%
haloketones (HK)				
1,1-dichloro-2-propanone	—	0.0072	0.0001	99%
1,1,1-trichloro-2-propanone	—	0.0082	0.0003	96%
heptachlor (H-34, Heptox)	0.0004	0.025	0.00001	>99%
heptachlor epoxide	0.0002	0.0107	0.0002	98%
hexachlorobutadiene	—	0.044	0.001	>98%
hexachlorocyclopentadiene	0.05	0.060	0.000002	>99%
lindane	0.0002	0.055	0.00001	>99%
methoxychlor	0.04	0.050	0.0001	>99%
pentachlorophenol	0.001	0.096	0.001	>99%
simazine	0.004	0.120	0.004	>97%
styrene	0.1	0.150	0.0005	>99%
1,1,2,2-tetrachloroethane	—	0.081	0.001	>99%
tetrachloroethylene	0.005	0.081	0.001	>99%
toluene	1	0.078	0.001	>99%
2,4,5-TP (silvex)	0.05	0.270	0.0016	99%
tribromoacetic acid	—	0.042	0.001	>98%
1,2,4-trichlorobenzene	0.07	0.160	0.0005	>99%
1,1,1-trichloroethane	0.2	0.084	0.0046	95%
1,1,2-trichloroethane	0.005	0.150	0.0005	>99%
trichloroethylene	0.005	0.180	0.0010	>99%
Trihalomethanes (THMs)		Influent/Unfiltered	Effluent/Filtered	Percent Reduction
Bromodichloromethane (THM)				
Bromoform (THM)				
Chloroform (THM)	0.080	0.300	0.015	95%
Chlorodibromomethane (THM)				
Xylenes (total)	10	0.070	0.001	>99%

Do not use with water that is microbiologically unsafe or of unknown water quality without adequate disinfection before or after the system.



## 1-Year Limited Warranty

### WHAT IS COVERED:

This Warranty covers defects in materials or workmanship in manufacturing of your AquaSana drinking or shower water filter systems, except as provided below.

### FOR HOW LONG:

This warranty runs for 365 days from the date of purchase by a consumer ("Warranty Period").

### WHAT IS NOT COVERED:

This warranty does not cover filter cartridges and any products that were not installed in compliance with the instructions or that have been abused or operated incorrectly. It also does not cover incidental or consequential damages caused by a failure of the product. Finally, this warranty is voided if the product is used with parts that are not genuine AquaSana parts. This includes, but is not limited to: replacement filters, faucets, and diverter valves. This warranty does not cover the RHINO Whole House Filtration System.

### WHAT AQUASANA, INC. WILL DO:

We will replace the defective part of the covered product and send it to you with installation instructions upon payment of \$9.50 for shipping and handling per incident.

### HOW TO GET SERVICE:

To receive service under this Warranty, you must contact AquaSana, Inc. at 1-866-662-6885 or [warranty@aquasana.com](mailto:warranty@aquasana.com) within the Warranty Period to describe the problem to a customer service representative who will verify that the product is under warranty and arrange for delivery of a replacement part.

### HOW STATE LAW APPLIES:

This warranty gives you specific rights and you may have other rights which vary from state to state.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

**WARRANTY CARD:** Warranty registration is not required for coverage under the AquaSana Limited Warranty and is not necessary for factory direct purchases made from [www.aquasana.com](http://www.aquasana.com). If you purchased from a retailer or dealer, please complete the online warranty registration form at [www.aquasana.com/warranty](http://www.aquasana.com/warranty). Once registered online, we will have a record of your purchase and you will not be required to produce a proof of purchase for a warranty claim.

**AquaSana, Inc.**  
6310 Midway Road  
Haltom City, TX 76117

**(866) 662-6885**  
[info@aquasana.com](mailto:info@aquasana.com)  
[www.aquasana.com](http://www.aquasana.com)



**Aquasana, Inc.**

6310 Midway Road  
Haltom City, Texas 76117  
866.662.6885 USA  
877.332.7873 Canada  
[www.aquasana.com](http://www.aquasana.com)

**For exclusive deals**

 [facebook.com/aquasana](https://facebook.com/aquasana)  
 [twitter.com/aquasana](https://twitter.com/aquasana)



System tested and certified by NSF International against NSF/ANSI Standard 42, 53 & 401 and conforms to NSF protocol P473 for reduction of claims specified on the Performance Data Sheet and at [nsf.org](http://nsf.org).